




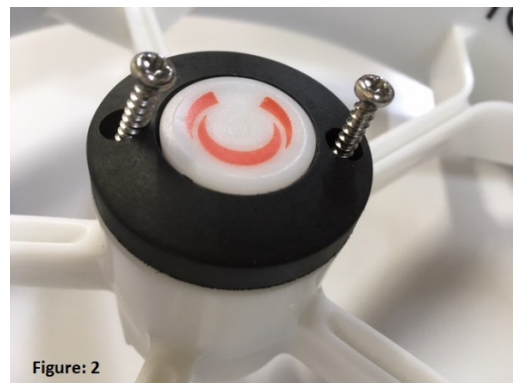


CBM3 WHEEL SPRING REPLACEMENT INSTRUCTIONS


Step 1: Remove the wheel from the buggy and remove the 2 screws which secure the black cap around the wheel removal button as per Figures: 1&2

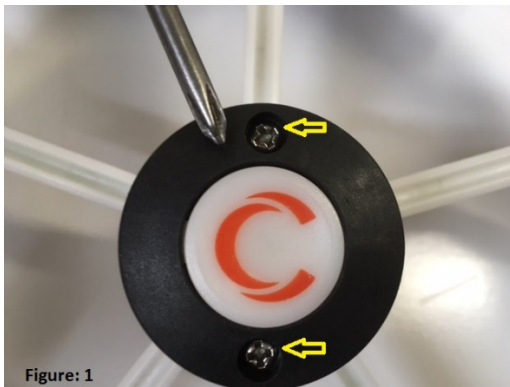

Step 2: Remove the black Retaining Ring and the Centre Release Button as per Figures: 2 & 3 below

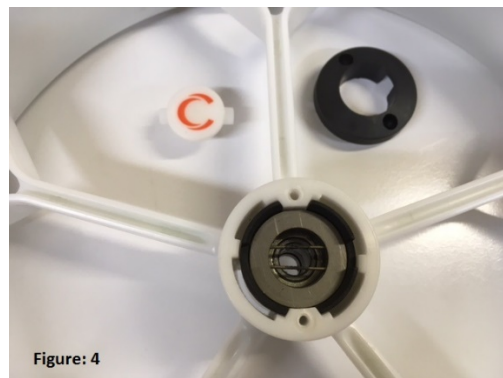
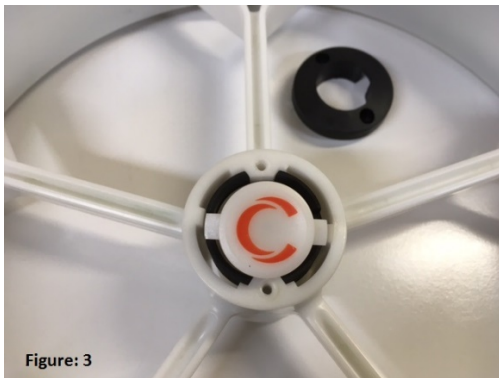


Step 3: Remove the Metal Washer and the old Wheel Spring from the wheel as per Figures: 5 & 6 Below

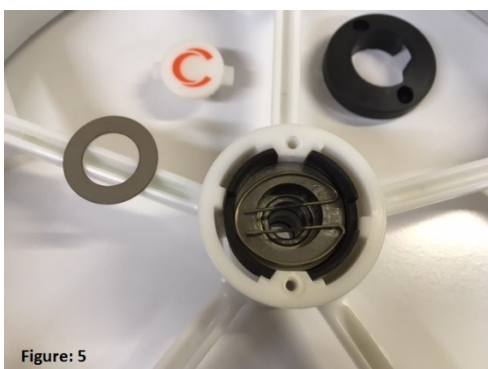

Step 4 : Fit new shaped Wheel Spring, Metal Washer and new Centre Release Button as per Figures: 7 & 8 below.

Note: Please take care that the pointy end of the Centre Release Button fits in between the two sections of the Wheel Spring as indicated by arrows on Figure No 8 below.

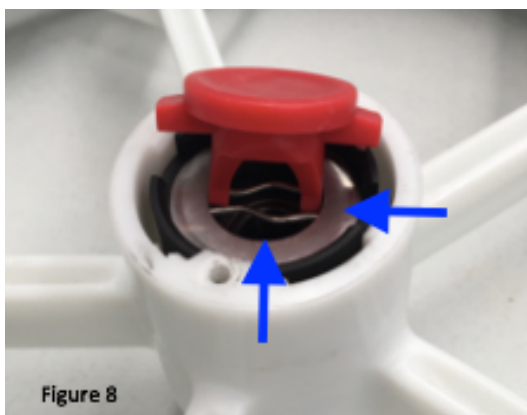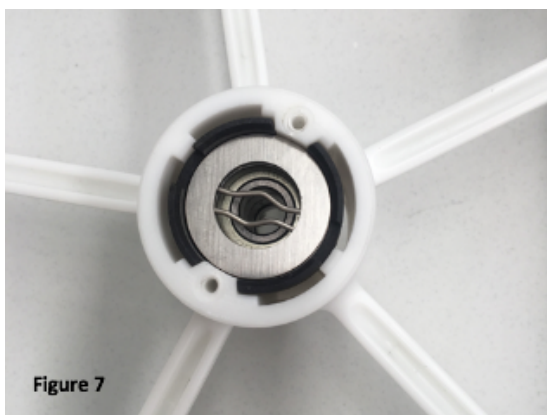

Step 5: Refit black retaining ring and then refit and tighten screws as per figures: 9 & 10 below

Note: Please don't overtighten securing screws.

