

**CBM3**

**INSTRUCTION MANUAL**

---

# **WHEEL SPRING REPLACEMENT**





VERSION 1.0

 **CONCOURSE**  
CONQUER THE COURSE





## CBM3 WHEEL SPRING REPLACEMENT INSTRUCTIONS


**Step 1: Remove the wheel from the buggy and remove the 2 screws which secure the black cap around the wheel removal button as per Figures: 1&2**

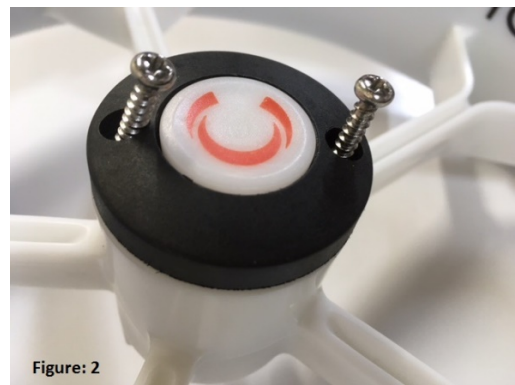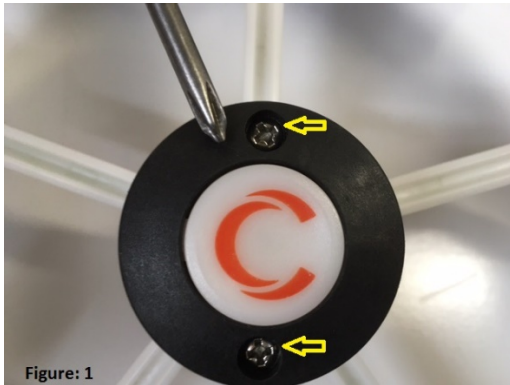

**Step 2: Remove the black Retaining Ring and the Centre Release Button as per Figures: 2 & 3 below**

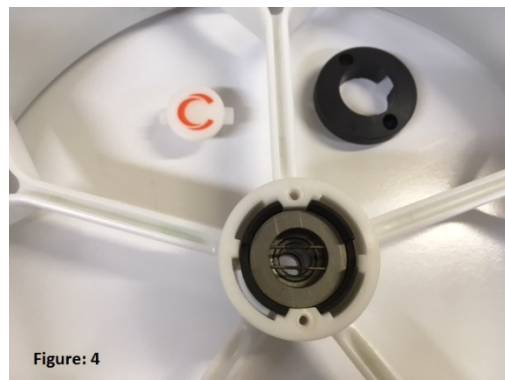
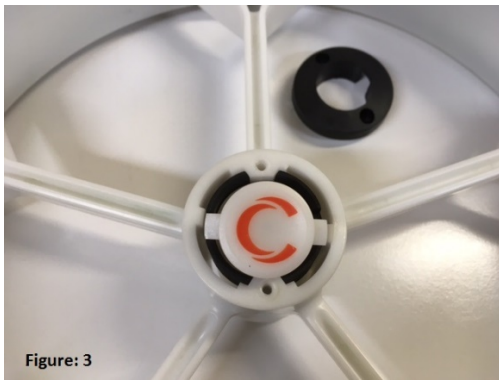


**Step 3: Remove the Metal Washer and the old Wheel Spring from the wheel as per Figures: 5 & 6 Below**

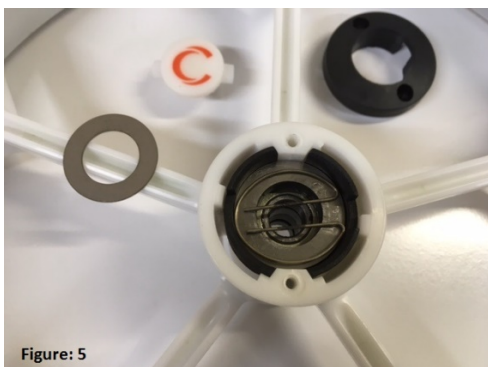

**Step 4 : Fit new shaped Wheel Spring, Metal Washer and new Centre Release Button as per Figures: 7 & 8 below.**

**Note: Please take care that the pointy end of the Centre Release Button fits in between the two sections of the Wheel Spring as indicated by arrows on Figure No 8 below.**

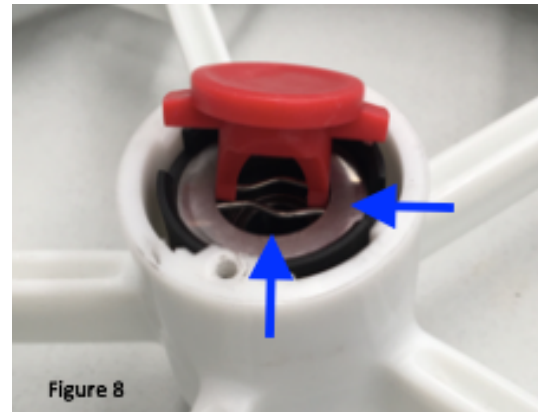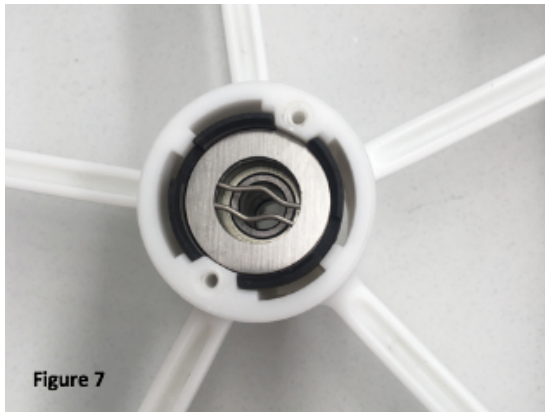

---

**Step 5: Refit black retaining ring and then refit and tighten screws as per figures: 9 & 10 below**

**Note: Please don't overtighten securing screws.**

